

HIGH SPEED / HIGH TEMPERATURE CARTRIDGE HEATER



STC-1200-HS

Heats to 1200°C in a very short time!




Standard Specifications



1. Outer Diameter / Voltage / Length / Wattage / Temperature

OD(mm)	Voltage(V)	Max. HeatUnit Length(mm)	Max Wattage(W)	Max Temp(°C)
23.5φ	200 / 220	500	7000	1200

- 2. Dimensional Tolerance OD ± 0.3 L ± 2
- 3. Capacity Tolerance ±10%
- 4. Lead Length 1000m
- 5. Temperature Control PID (Temperature Controller + Solid State Relay)
- 6. Warning Guard against current leakage

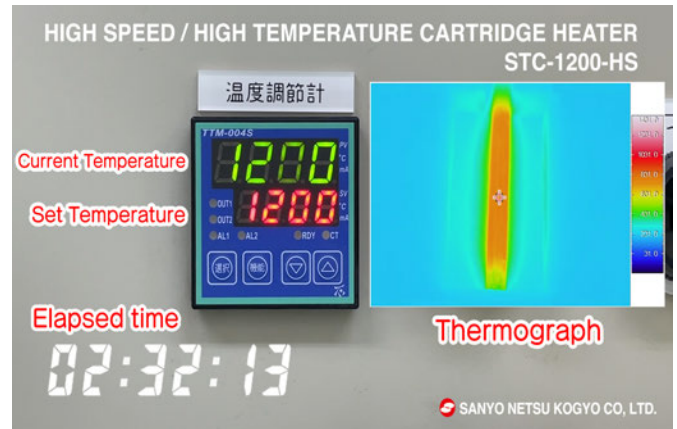


Blueprint

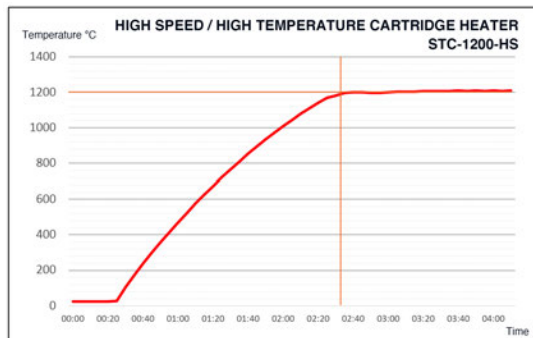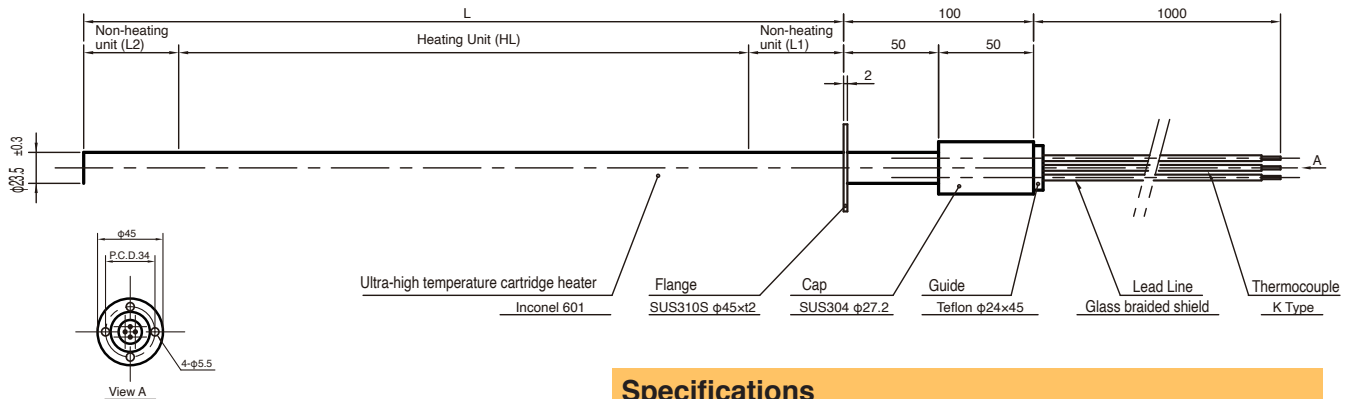

Specifications

- 1. Power Consumption: Rating±10%
- 2. Insulation Resistance: +10MΩ(DC500Vmega at shipping)
- 3. Voltage Endurance: 1500V/1min. or 1800V/1sec.(at shipping)
- 4. Pipe Material: Inconel601

Type

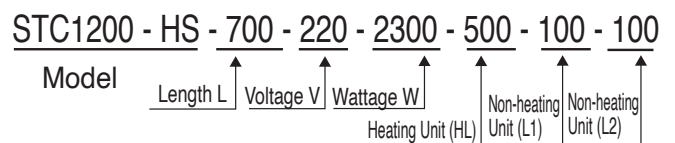

3-15-7 Degawa-cho, Kasugai-shi Aichi-ken 487-0025 Japan Phone: +81-568-51-2851
E-mail: info@snk-kk.co.jp www.snk-kk.co.jp

